




COATING SYSTEMS FORMULATED TO LAST

LIBERTY STANDARD FLAKE SYSTEM

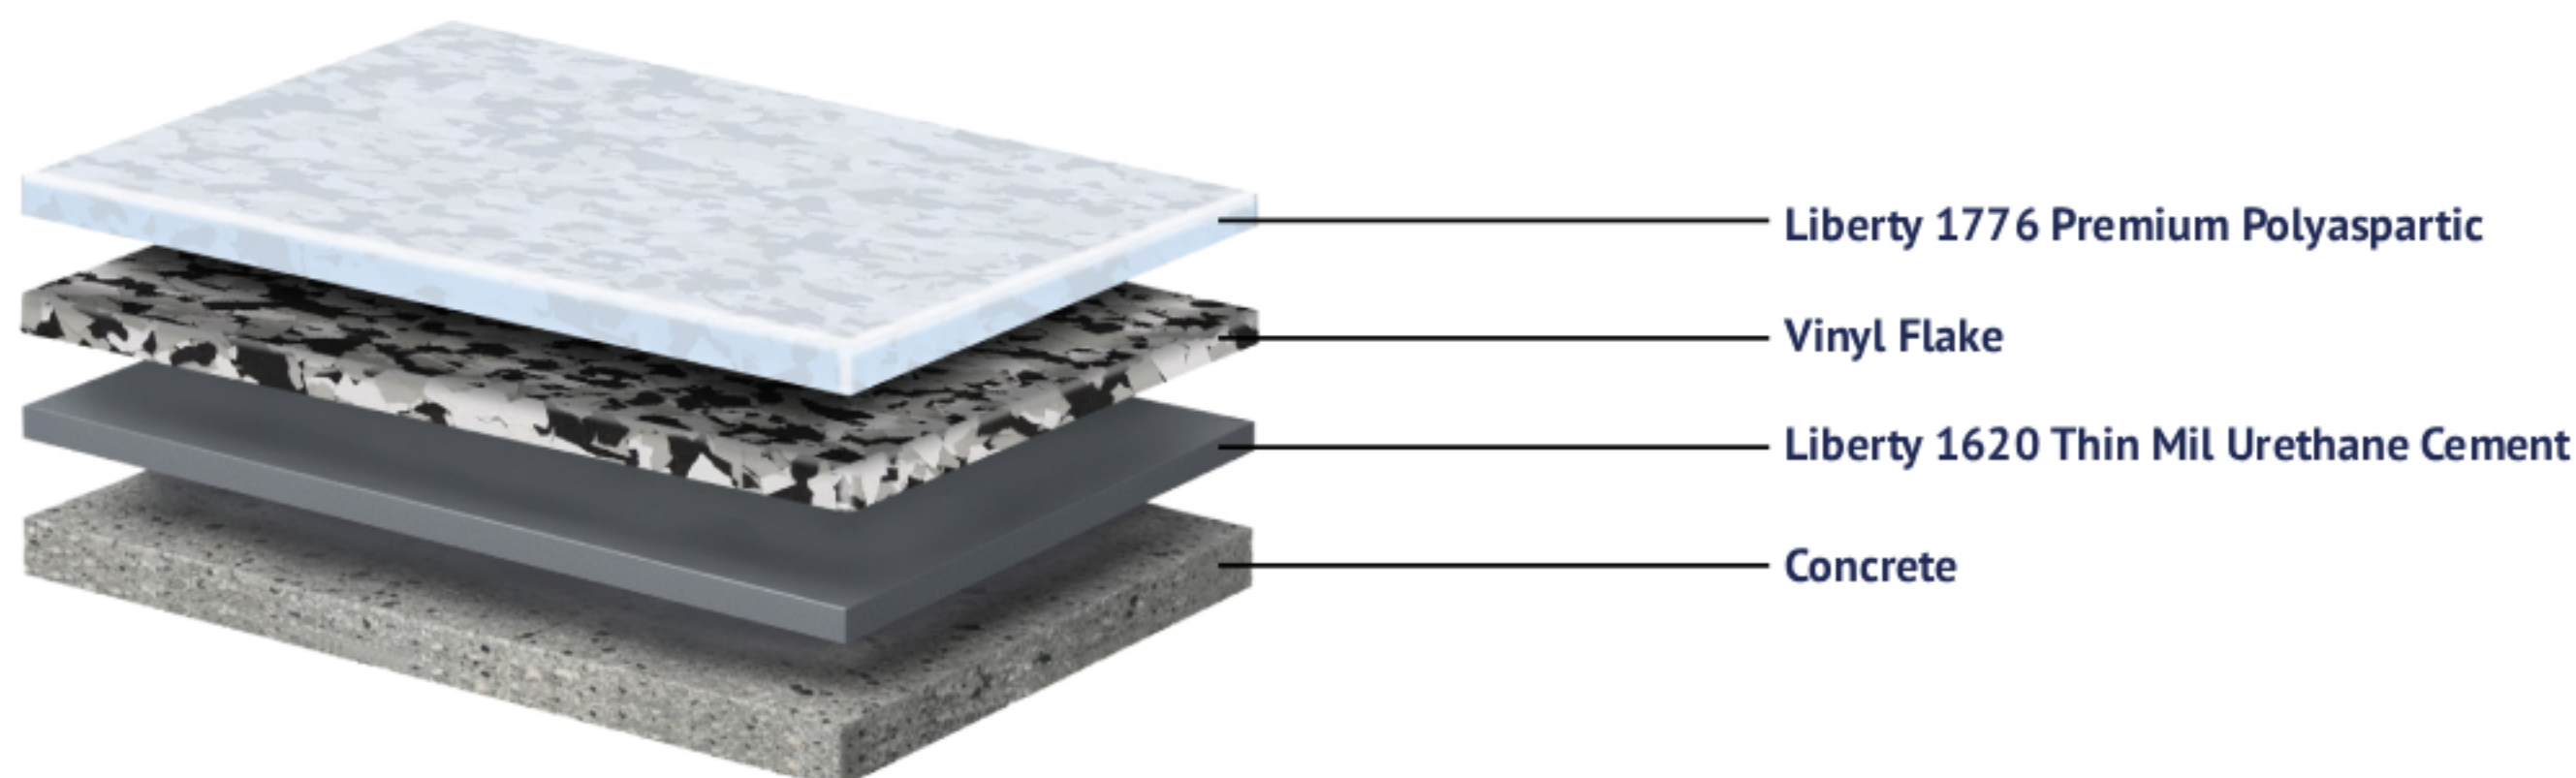

LAYER FORMULAS

1st Layer/ Base Coat - LIBERTY 1620 TMUC	_____ SQ FT Divided by 200 SQ FT per kit = _____ KITS.
Broadcast decorative vinyl flake to 100% refusal (5-7 sq ft per lb)	
2nd Layer/Top Coat - LIBERTY 1776 PREMIUM POLYASPARTIC (Clear)	_____ SQ FT Divided by 200 SQFT per 2 Gal kit = _____ KITS (Depending on whether you scrape or sand the flakes)

*ULTRA FAST CURE AVAILABLE FOR QUICK RETURN TO SERVICE

SYSTEM DESCRIPTION:

LIBERTY STANDARD FLAKE SYSTEM is a light to medium duty industrial grade flooring system featuring our high quality Thin Mil Urethane Cement to form a seamless, breathable system with impact resistance and thermal shock capabilities reducing the variables that cause flooring failures and keeping the facility in compliance with all cGMP requirements.

This system is finished off with our Premium Polyaspartic clear Top Coat to provide superior protection against wear and chemical exposure.

• Complete Moisture Protection

3rd Party lab approved to handle the highest level of moisture vapor without compromise. Up to 99% RH and 25 lbs, based on Calcium Chloride test.

• Wear / Chemical Resistant

Our industrial-grade polyurethane and polyaspartic topcoat options provide superior protection against wear, chemicals and UV degradation.

• Thermal Shock & UV Resistant

System is UV resistant and can withstand high thermal cycling or rapid changes in temperature, from -20° up to 230° F.

• Safety Built-In

Slip-resistant textures help maintain traction and safety, even when floors are wet.

APPLICATIONS:

- Laboratories
- Pharmaceuticals
- Clean Rooms
- Restrooms
- Locker Rooms
- Lobbies
- Schools
- Supermarkets
- Cafeterias
- Dining Areas
- Hospitals
- Retail

*** MEETS ALL FDA, USDA, EPA, ADA, and OSHA requirements***

LIBERTY ICS | LOS ANGELES, CA | TOLL FREE: 800.208.4104